




## HT532系列 三相三线电源滤波器

- 低泄漏电流
- 适用于脉冲数字设备
- 另有HT532G系列适用于预防电网中高频杂波对设备的干扰



型 号	额定 电流 A	连接方式		外壳	电感量 L mH	电 容		电阻 R MΩ	漏电流 mA @250VAC/50Hz
		 焊片	 螺栓			Cx μF	Cy nF		
HT532-6-L8-C31	6	L8	--	C31	6.0	0.47	10	1.0	1.2
HT532-6-M4-C31	6	--	M4	C31	6.0	0.47	10	1.0	1.2
HT532-10-L8-C31	10	L8	--	C31	4.0	0.47	10	1.0	1.2
HT532-10-M4-C31	10	--	M4	C31	4.0	0.47	10	1.0	1.2
HT532-16-L8-C31	16	L8	--	C31	3.0	0.47	22	1.0	2.5
HT532-16-M4-C31	16	--	M4	C31	3.0	0.47	22	1.0	2.5
HT532-20-L8-C31	20	L8	--	C31	2.5	0.47	22	1.0	2.5
HT532-20-M4-C31	20	--	M4	C31	2.5	0.47	22	1.0	2.5
HT532-25-M4-C31	25	--	M4	C31	2.5	0.47	22	1.0	2.5
HT532-30-M6-E32	30	--	M6	E32	2.0	1.0	22	0.47	2.5
HT532-40-M6-E32	40	--	M6	E32	--	--	--	--	--
HT532-50-M6-E32	50	--	M6	E32	--	--	--	--	--
HT532-60-M6-G32	60	--	M6	G32	--	--	--	--	--
HT532-70-M6-G32	70	--	M6	G32	--	--	--	--	--
HT532-80-M8-G33	80	--	M8	G33	--	--	--	--	--
HT532-100-M8-G33	100	--	M8	G33	--	--	--	--	--
HT532-120-M8-G33	120	--	M8	G33	--	--	--	--	--
HT532-150-M10-G35	150	--	M10	G35	--	--	--	--	--
HT532-180-M10-G35	180	--	M10	G35	--	--	--	--	--

\* 连接方式：L8-焊片（6.3\*0.8）；M4-M4螺栓；M6-M6螺栓；M8-M8螺栓；M10-M10螺栓。

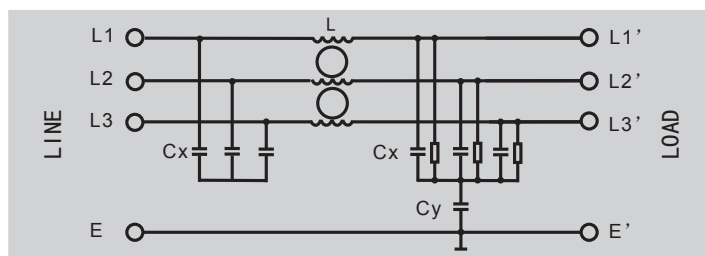

工作频率:50/60Hz  
 额定电压:440VAC  
 额定电流：6~120A（50℃时），最大值  
 耐压测试(2秒钟):  
 2250VDC(L-L) 2700VDC(L-E)  
 温度范围:-25℃~+85℃



HUGETON


惠博顿

# HT532系列 三相三线电源滤波器

插入损耗

符合IEC/CISPR NO.17

50Ω/50Ω共模: — 50Ω/50Ω差模: - - - -

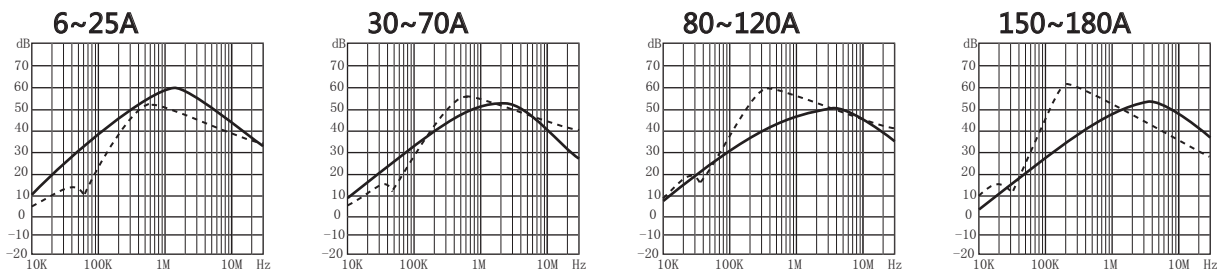

外形尺寸

单位: mm 公差: ±1

