



## HT120/121系列 单相单级电源滤波器

- 基础电路
- 低泄漏电流
- 体积小巧，便于安装

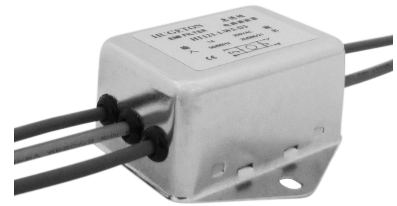

型号	额定 电流 A	连接方式		外壳	电感量 L mH	电容		漏电流 @250V/50Hz mA
		引线	焊片			Cx μF	Cy nF	
HT120-1-L8-D1	1	--	L8	D1	2.5	0.1	2.2	0.5
HT120-3-L8-D1	3	--	L8	D1	1.0	0.1	2.2	0.5
HT120-6-L8-D1	6	--	L8	D1	0.5	0.1	2.2	0.5
HT120-10-L8-D1	10	--	L8	D1	0.3	0.1	2.2	0.5
HT121-1-W5-D3	1	W5	--	D3	4.0	0.1	2.2	0.5
HT121-1-W5-D4	1	W5	--	D4	4.0	0.1	2.2	0.5
HT121-3-W5-D3	3	W5	--	D3	1.8	0.1	2.2	0.5
HT121-3-W5-D4	3	W5	--	D4	1.8	0.1	2.2	0.5
HT121-6-W5-D3	6	W5	--	D3	0.8	0.1	2.2	0.5
HT121-6-W5-D4	6	W5	--	D4	0.8	0.1	2.2	0.5
HT121-10-L8-D2	10	--	L8	D2	0.8	0.1	2.2	0.5
HT121-16-L8-D2	16	--	L8	D2	0.4	0.1	2.2	0.5
HT121-20-L8-D2	20	--	L8	D2	0.3	0.1	2.2	0.5

\* 连接方式：W5-引线（127mm）；L8-焊片（6.3\*0.8）。

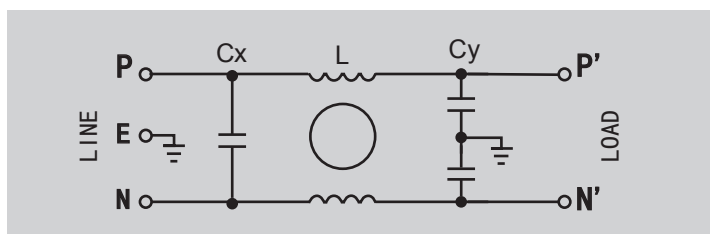

工作频率:50/60Hz  
 额定电压:250VAC  
 额定电流：1~20A（40℃时），最大值  
 耐压测试(2秒钟):  
 1760VDC(P-N) 2000VAC(P-E)  
 温度范围:-25℃~+85℃









HUGETON  
惠博顿

# HT120/121系列 单相单级电源滤波器

## 插入损耗

符合IEC/CISPR NO.17


50Ω/50Ω共模: —— 50Ω/50Ω差模: - - - - -

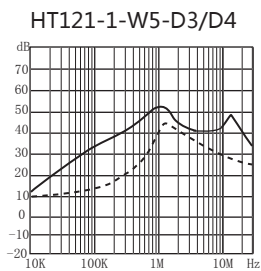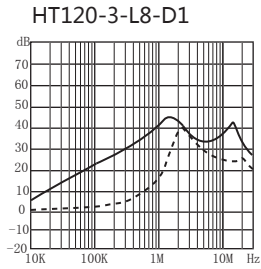

## 外形尺寸

单位: mm 公差: ±1

### HT120系列



### HT121系列

