


HT2530系列 单相变频输入专用滤波器

- 低泄漏电流
- 两级滤波,共模增强
- 有效滤波范围: 150KHz ~ 30MHz
- 适用于变频器输入端
- 另有HT2530G系列适用于敏感设备,防止外界环境对设备干扰



型号	额定 电流 A	连接方式			外壳
		引线	焊片	螺栓	
HT2530-1-W5-A2	1	W5	--	--	A2
HT2530-1-L8-A2	1	--	L8	--	A2
HT2530-3-L8-H1	3	--	L8	--	H1
HT2530-4-L8-H1	4	--	L8	--	H1
HT2530-6-L8-H2	6	--	L8	--	H2
HT2530-8-L8-H2	8	--	L8	--	H2
HT2530-10-L8-H2	10	--	L8	--	H2
HT2530-12-L8-H2	12	--	L8	--	H2
HT2530-16-L8-H2	16	--	L8	--	H2
HT2530-16-M4-H2	16	--	--	M4	H2
HT2530-20-L8-H5	20	--	L8	--	H5
HT2530-20-M4-H5	20	--	--	M4	H5
HT2530-25-M4-H5	25	--	--	M4	H5
HT2530-30-M4-J3	30	--	--	M4	J3

* 连接方式: W5-引线(127mm); L8-焊片(6.3*0.8); M4-M4螺栓。

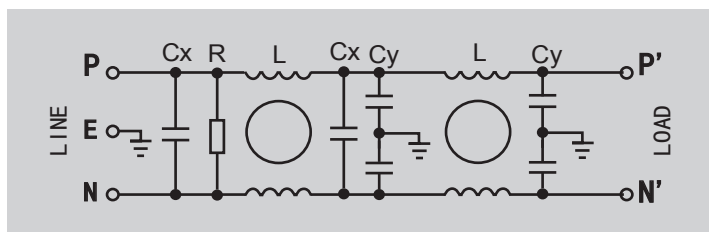

工作频率:50/60Hz

额定电压:250VAC

额定电流: 1 ~ 30A (40°C时), 最大值

耐压测试(2秒钟):

1760VDC(P-N) 2000VAC(P-E)

温度范围:-25°C ~ +85°C



HUGETON




惠博顿

HT2530系列 单相变频输入专用滤波器

插入损耗

符合IEC/CISPR NO.17

50Ω/50Ω共模: — 50Ω/50Ω差模: - - - - -

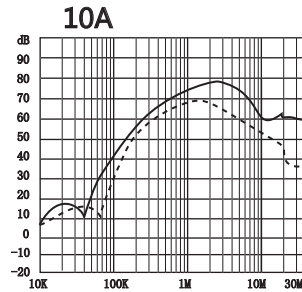

外形尺寸

单位: mm 公差: ±1

