




HT5310系列 三相三线电源滤波器

- 适用于三相三线供电的工业设备、仪器
- 与变频器配套使用
- 另有HT5310G系列适用于预防电网中高频杂波对设备的干扰



型 号	额定 电流 A	连接方式		外壳
		 焊片	 螺栓	
HT5310-6-L8-C31	6	L8	--	C31
HT5310-6-M4-C31	6	--	M4	C31
HT5310-10-L8-C31	10	L8	--	C31
HT5310-10-M4-C31	10	--	M4	C31
HT5310-16-L8-C31	16	L8	--	C31
HT5310-16-M4-C31	16	--	M4	C31
HT5310-20-L8-C31	20	L8	--	C31
HT5310-20-M4-C31	20	--	M4	C31
HT5310-25-M4-C31	25	--	M4	C31
HT5310-32-M6-E32	32	--	M6	E32
HT5310-42-M6-E32	42	--	M6	E32
HT5310-50-M6-E32	50	--	M6	E32
HT5310-65-M6-G32	65	--	M6	G32
HT5310-80-M8-G33	80	--	M8	G33
HT5310-100-M8-G33	100	--	M8	G33
HT5310-120-M8-G33	120	--	M8	G33
HT5310-150-M10-G35	150	--	M10	G35
HT5310-180-M10-G35	180	--	M10	G35

* 连接方式：L8-焊片（6.3*0.8）；M4-M4螺栓；M6-M6螺栓；M8-M8螺栓；M10-M10螺栓。

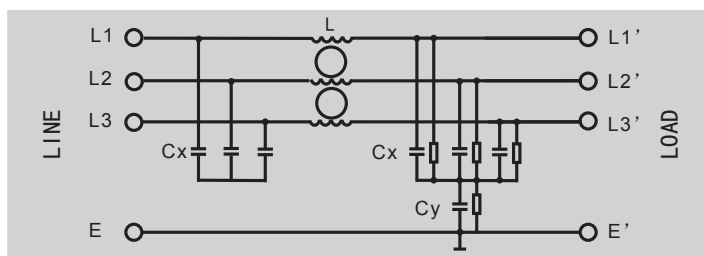

工作频率:50/60Hz
 额定电压:440VAC
 额定电流：6 ~ 180A（50℃时），最大值
 耐压测试(2秒钟):
 2250VDC(L-L) 2700VDC(L-E)
 温度范围:-25℃ ~ +85℃



HUGETON


惠博顿

HT5310系列 三相三线电源滤波器

插入损耗

符合IEC/CISPR NO.17

50Ω/50Ω共模: — 50Ω/50Ω差模: - - - -

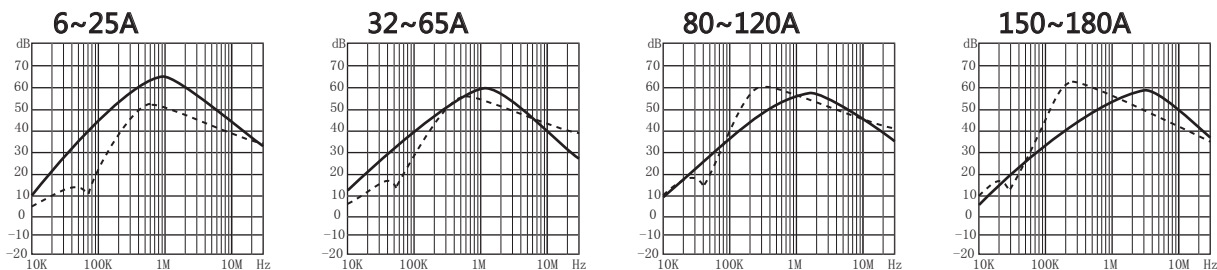

外形尺寸

单位: mm 公差: ±1

