


PCB插针系列 PCB电路板专用单级型

- 低泄漏电流
- 专为PCB电路板设计
- 多种安装尺寸



型号	额定电流 A	连接方式 插针	外壳	电感量 L mH	电容		漏电流 @250V/50Hz mA
					Cx μF	Cy nF	
HT401-1-P16-P1	1	P16	P1	2.5	0.1	2.2	0.5
HT401-2-P16-P1	2	P16	P1	1.5	0.1	2.2	0.5
HT401-3-P16-P1	3	P16	P1	1.0	0.1	2.2	0.5
HT401-1-P18-P1	1	P18	P1	2.5	0.1	2.2	0.5
HT401-2-P18-P1	2	P18	P1	1.5	0.1	2.2	0.5
HT401-3-P18-P1	3	P18	P1	1.0	0.1	2.2	0.5
HT402-1-P21-P2	1	P21	P2	4.0	0.1	2.2	0.5
HT402-2-P21-P2	2	P21	P2	2.5	0.1	2.2	0.5
HT402-3-P21-P2	3	P21	P2	1.5	0.1	2.2	0.5

* 插针直径：Φ1.0mm


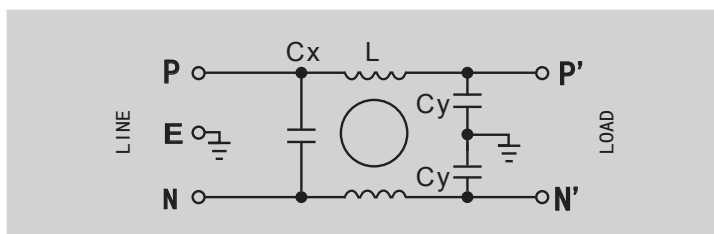


工作频率:50/60Hz 额定电压:250VAC
 额定电流：1~3A(40℃)，最大值
 耐压测试(2秒钟):
 1500VDC(P-N) 1500VAC(P-E)
 温度范围:-25℃~+85℃

插入损耗

符合IEC/CISPR NO.17

50Ω/50Ω共模：—— 50Ω/50Ω差模：-----



外形尺寸

单位：mm 公差：±1

