


HT4530系列 单相双级高性能电源滤波器

- 独立差模电感
- 低泄漏电流
- 优异的中低频滤波性能
- 有效滤波范围：50KHz ~ 30MHz
- 适用于抑制中低频强脉冲干扰



型号	额定 电流 A	连接方式			外壳
		引线	焊片	螺栓	
HT4530-1-W5-A2	1	W5	--	--	A2
HT4530-1-L8-A2	1	--	L8	--	A2
HT4530-2-W5-A2	2	W5	--	--	A2
HT4530-2-L8-A2	2	--	L8	--	A2
HT4530-3-L8-H1	3	--	L8	--	H1
HT4530-4-L8-H1	4	--	L8	--	H1
HT4530-6-L8-H2	6	--	L8	--	H2
HT4530-8-L8-H2	8	--	L8	--	H2
HT4530-10-L8-H2	10	--	L8	--	H2
HT4530-12-L8-H2	12	--	L8	--	H2
HT4530-16-L8-H5	16	--	L8	--	H5
HT4530-16-M4-H5	16	--	--	M4	H5
HT4530-20-L8-J3	20	--	L8	--	J3
HT4530-20-M4-J3	20	--	--	M4	J3
HT4530-25-M4-J3	25	--	--	M4	J3
HT4530-30-M4-Q21	30	--	--	M4	Q21

* 连接方式：W5-引线（127mm）；L8-焊片（6.3*0.8）；M4-M4螺栓。

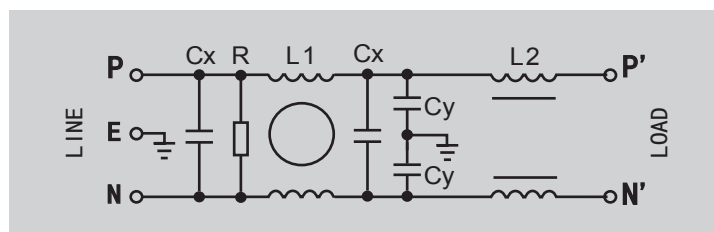

工作频率:50/60Hz

额定电压:250VAC

额定电流：1 ~ 30A(40℃时)，最大值

耐压测试(2秒钟):

1760VDC(P-N) 2000VAC(P-E)

温度范围:-25℃ ~ +85℃



HUGETON




惠博顿

HT4530系列 单相双级高性能电源滤波器

插入损耗


符合IEC/CISPR NO.17

50Ω/50Ω共模: — 50Ω/50Ω差模: - - - - -




外形尺寸


单位: mm 公差: ±1

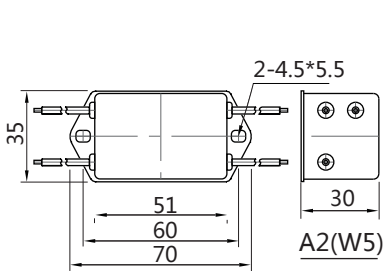


1~2A




1~2A

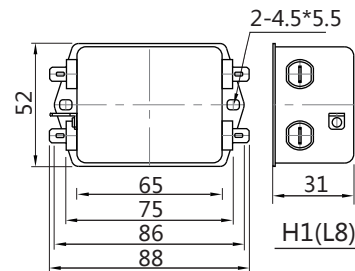


3~4A

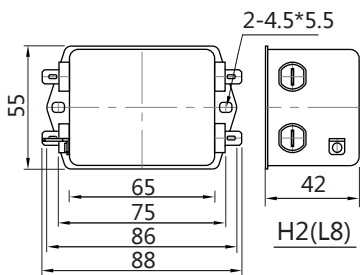


6~12A

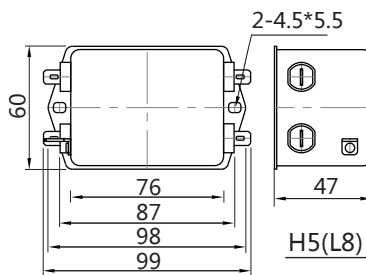


16A

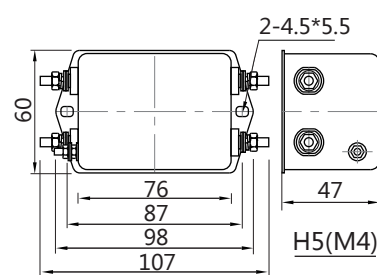


16A

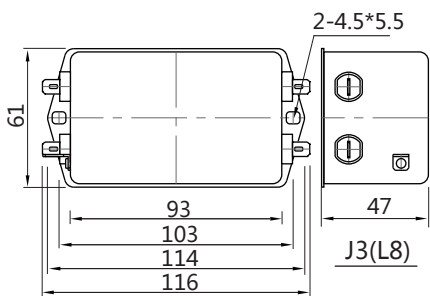

20A

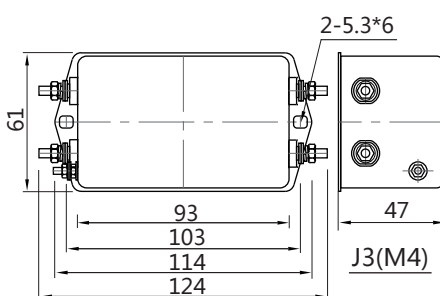

20~25A

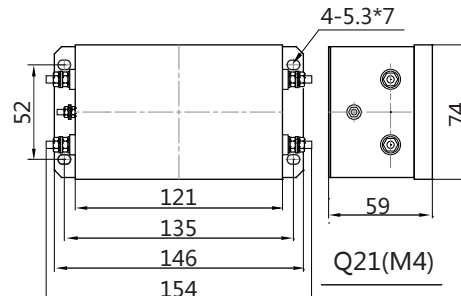

30A